PRODUCT DATASHEET



Soldered Electrochemical NO Gas Sensor Breakout (Qwiic)

333327

Nitric oxide sensor board with an SGX-4NO-250 electrochemical cell for 0 to 250 ppm, read by an LMP91000 and a 16-bit ADC over Qwiic.

Full product documentation, files and tutorials: **solde.red/333327**

CORE ATTRIBUTES

SKU	**333327**
DIMENSIONS	**38.0 × 38.0 × — mm**
ORIGIN	**HR**
BARCODE	**0732388655809**

DESCRIPTION

This board measures nitric oxide (NO) with an **SGX-4NO-250** electrochemical cell. The **LMP91000** analog front end biases the cell and turns its current into a voltage, a **16-bit ADS1115** ADC converts that voltage, and an **ATtiny404** talks to both chips for you, so your microcontroller sees a single I2C device.

The cell covers **0 to 250 ppm** with a resolution of 0.5 ppm and reaches 90% of a step in under 40 s. It works from -30 to 50 °C and 15 to 90% RH. The libraries include a preset for this cell and a zero calibration routine for clean air. The ADS1115's other three inputs, AIN1 to AIN3, are on a header for your own analog signals.

Connect the board with either of the two **Qwiic** connectors or the 2.54 mm headers. It runs from **3.3 V**; there is no regulator, so the header and the Qwiic connectors share one 3.3 V supply. The default address is **0x30**; the three DIP switches move it from 0x30 to 0x37, so up to eight boards share one bus. The front end's analog output VOUT and the ADC's ALERT pin are on the header too. There are libraries for Arduino and MicroPython, plus an ESP-IDF component and an ESPHome component.

TECHNICAL DETAILS

- **Gas:** nitric oxide (NO)
- **Gas cell:** SGX-4NO-250, electrochemical
- **Range:** 0 to 250 ppm
- **Resolution:** 0.5 ppm
- **Response time:** T90 under 40 s
- **Repeatability:** < ±2% NO equivalent
- **Operating conditions:** -30 to 50 °C, 15 to 90% RH

- **Expected cell life:** over 12 months in air
- **Analog front end:** Texas Instruments LMP91000
- **ADC:** Texas Instruments ADS1115, 16-bit
- **Bridge MCU:** Microchip ATtiny404 (factory firmware)
- **Interface:** I2C, address 0x30 (0x30 to 0x37 by switch)
- **Supply:** 3.3 V, no regulator; the Qwiic connectors share this supply
- **Header pins:** VOUT (analog out), ALERT, AIN1 to AIN3 (analog in)
- **Connectors:** 2x Qwiic, 2.54 mm headers
- **Dimensions:** 38 × 38 mm

SPECIFICATIONS

INTERFACE	I2C, Analog, Digital Gpio
QWIIC COMPATIBLE	Yes
I2C ADDRESS DEFAULT	0x30
I2C ADDRESS CHANGEABLE	Yes
BREADBOARD COMPATIBLE	No
MEASUREMENT TYPES	Gas
MEASUREMENT RANGE	0 to 250 ppm NO (SGX-4NO-250); max overload 1000 ppm
MEASUREMENT ACCURACY	Repeatability < ±2% NO equivalent; linear; resolution 0.5 ppm typical (electronics dependent); T90 under 40 s
IC PART NUMBER	LMP91000
MCU PART NUMBER	ATtiny404
SUPPLY VOLTAGE MIN V	3.3
SUPPLY VOLTAGE MAX V	3.3
LOGIC LEVEL	3V3 Only

DOCUMENTS

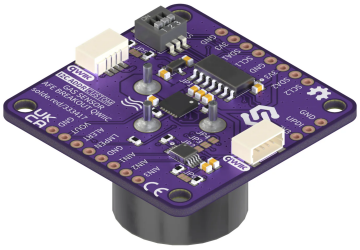
Main IC Datasheet · EN	https://cms.soldered.com/products/333327/documents/ic-datasheet/333327_ic-datasheet_716f1d.pdf

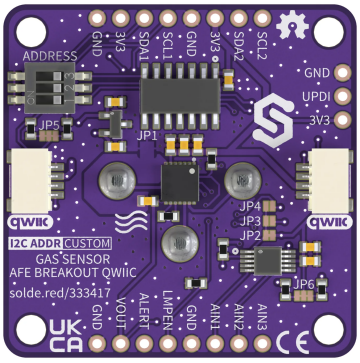
LINKS

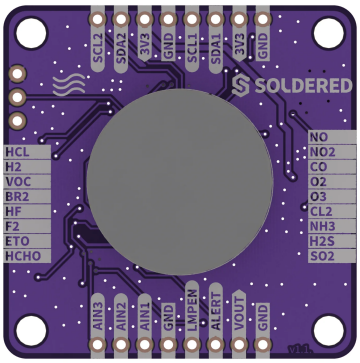
Full Documentation	https://docs2.soldered.com/soldered-electrochemical-no-gas-sensor-breakout-qwiic/
mim_package	https://checkmim.com/packages/solderedelectronics+Soldered-ElectrochemicalGasSensor-MicroPython-Library
Arduino Library	https://github.com/SolderedElectronics/Soldered-Electrochemical-Gas-Sensor-Arduino-Library

MicroPython Module	https://github.com/SolderedElectronics/Soldered-ElectrochemicalGasSensor-MicroPython-Library
Pinout	https://cms.soldered.com/products/333327/media/333327_pinout-png_241b50.png

GALLERY




ADDRESS
JP5
JP1
JP4
JP3
JP2
JP6
GND
UPDI
3V3
SCL2
SDA2
SCL1
SDA1
I2C ADDR CUSTOM
GAS SENSOR
AFE BREAKOUT QWIIC
solde.red/333417
ALERT
VOUT
LMPEN
AIN1
AIN2
AIN3


SOLDERED
HCL
H2
VOC
BR2
HF
F2
ETO
HCHO
NO
NO2
CO
O2
O3
CL2
NH3
H2S
SO2