PRODUCT DATASHEET



Soldered Electrochemical Cl2 Gas Sensor Breakout (Qwiic)

333332

Chlorine sensor board with an SGX-4CL2 electrochemical cell for 0 to 10 ppm, read by an LMP91000 and a 16-bit ADC over Qwiic.

Full product documentation, files and tutorials: **solde.red/333332**

CORE ATTRIBUTES

SKU	**333332**
DIMENSIONS	**38.0 × 38.0 × — mm**
ORIGIN	**HR**
BARCODE	**0732388655304**

DESCRIPTION

This board measures chlorine (Cl2) with an **SGX-4CL2** electrochemical cell. The **LMP91000** analog front end biases the cell and turns its current into a voltage, a **16-bit ADS1115** ADC converts that voltage, and an **ATtiny404** talks to both chips for you, so your microcontroller sees a single I2C device.

The cell covers **0 to 10 ppm** with a resolution of 0.1 ppm and reaches 90% of a step in under 60 s. It works from -20 to 50 °C and 15 to 90% RH. The libraries include a preset for this cell and a zero calibration routine for clean air. The ADS1115's other three inputs, AIN1 to AIN3, are on a header for your own analog signals.

Connect the board with either of the two **Qwiic** connectors or the 2.54 mm headers. It runs from **3.3 V**; there is no regulator, so the header and the Qwiic connectors share one 3.3 V supply. The default address is **0x30**; the three DIP switches move it from 0x30 to 0x37, so up to eight boards share one bus. The front end's analog output VOUT and the ADC's ALERT pin are on the header too. There are libraries for Arduino and MicroPython, plus an ESP-IDF component and an ESPHome component.

TECHNICAL DETAILS

- **Gas:** chlorine (Cl2)
- **Gas cell:** SGX-4CL2, electrochemical
- **Range:** 0 to 10 ppm
- **Resolution:** 0.1 ppm
- **Response time:** T90 under 60 s
- **Repeatability:** < ±2% Cl2 equivalent
- **Operating conditions:** -20 to 50 °C, 15 to 90% RH

- **Expected cell life:** over 12 months in air
- **Analog front end:** Texas Instruments LMP91000
- **ADC:** Texas Instruments ADS1115, 16-bit
- **Bridge MCU:** Microchip ATtiny404 (factory firmware)
- **Interface:** I2C, address 0x30 (0x30 to 0x37 by switch)
- **Supply:** 3.3 V, no regulator; the Qwiic connectors share this supply
- **Header pins:** VOUT (analog out), ALERT, AIN1 to AIN3 (analog in)
- **Connectors:** 2x Qwiic, 2.54 mm headers
- **Dimensions:** 38 × 38 mm

SPECIFICATIONS

INTERFACE	I2C, Analog, Digital Gpio
QWIIC COMPATIBLE	Yes
I2C ADDRESS DEFAULT	0x30
I2C ADDRESS CHANGEABLE	Yes
BREADBOARD COMPATIBLE	No
MEASUREMENT TYPES	Gas
MEASUREMENT RANGE	0 to 10 ppm Cl2 (SGX-4CL2); max overload 100 ppm
MEASUREMENT ACCURACY	Repeatability < ±2% Cl2 equivalent; linear; resolution 0.1 ppm typical (electronics dependent); T90 under 60 s
IC PART NUMBER	LMP91000
MCU PART NUMBER	ATtiny404
SUPPLY VOLTAGE MIN V	3.3
SUPPLY VOLTAGE MAX V	3.3
LOGIC LEVEL	3V3 Only

DOCUMENTS

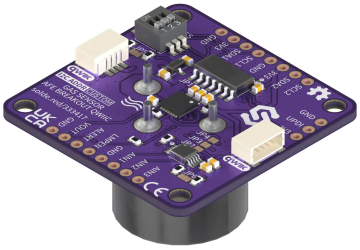
Main IC Datasheet · EN	https://cms.soldered.com/products/333332/documents/ic-datasheet/333332_ic-datasheet_2047e1.pdf

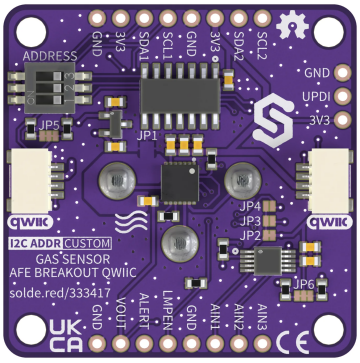
LINKS

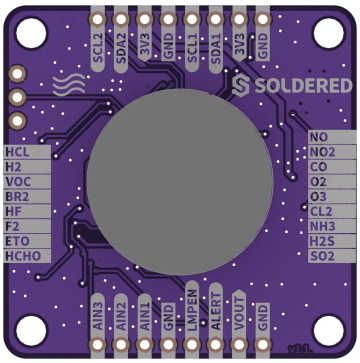
mim_package	https://checkmim.com/packages/solderedelectronics+Soldered-ElectrochemicalGasSensor-MicroPython-Library
Arduino Library	https://github.com/SolderedElectronics/Soldered-Electrochemical-Gas-Sensor-Arduino-Library
MicroPython Module	https://github.com/SolderedElectronics/Soldered-ElectrochemicalGasSensor-MicroPython-Library

Pinout	https://cms.soldered.com/products/333332/media/333332_pinout-png_6a4081.png

GALLERY




ADDRESS
JP5
JP1
JP4
JP3
JP2
JP6
GND
UPDI
3V3
qwiic
qwiic
I2C ADDR CUSTOM
GAS SENSOR
AFE BREAKOUT QWIIC
solde.red/333417
GND 3V3 SDA1 SCL1 GND 3V3 SDA2 SCL2
GND VOUT ALERT LMPEN GND AIN1 AIN2 AIN3


SOLDERED
SCL2 SDA2 3V3 GND SCL1 SDA1 3V3 GND
HCL
H2
VOC
BR2
HF
F2
ETO
HCHO
NO
NO2
CO
O2
O3
CL2
NH3
H2S
SO2
AIN3 AIN2 AIN1 GND LMPEN ALERT VOUT GND